NV51K7770DS

30" Double Wall Oven

Features

- 6 Oven Modes including Steam Bake and Steam Roast
- 5.1/5.1 cu. ft. Capacity
- Gourmet Cook
- Dual Convection
- Wi-Fi Connectivity
- Wi-Fi Enabled Temperature Probe
- LED Spotlights
- Soft-Close Door
- 6 Heavy-Duty Racks including 2 Gliding Racks
- Blue LED Illuminated Knobs
- Broil Element
- Smart Control Key
- 6 Rack Positions
- Drop-Down Door Design
- LCD Display

Convenience

- Hidden Heating Element
- Rapid Preheat
- Sabbath Mode
- Hybrid Clean and Self-Clean
- Delay Start
- Proofing
- Warming Mode
- Kitchen Timer
- Child Safety Lock
- Convection Conversion





Steam Cook



Flex Duo™

Available Colors



Stainless Steel (shown)



Black Stainless Steel

Signature Features

STEAM COOK

• Delivers moisture at precise times for a crisp, browned outside and tender inside.

FLEX DUO™

 \bullet Cook three dishes at different temperatures simultaneously with the Smart Divider.

DIGITAL-ANALOG CONTROLS

• The ultimate interface, a combination of analog-knobs and a digital touch screen.

NV51K7770DS

30" Double Wall Oven

Cabinet Dimensions

Double Oven Installed in Cabinet

*Junction Box

**Allow a minimum of 22" for clearance to adjacent corners, drawers, walls, etc. when door is open.


13/16"

Min.

281/2"285/8"

47" Min.

Product Dimensions

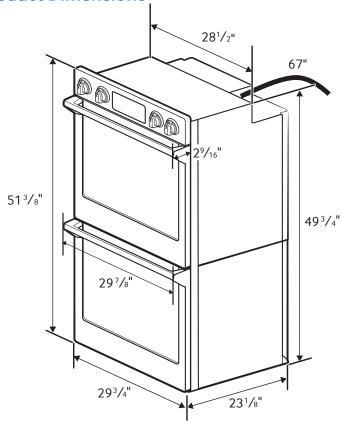

Total Capacity: 5.1/5.1 cu. ft.

Upper Oven: 5.1 cu. ft. total, 2.8/2.2 cu. ft. Lower Oven: 5.1 cu. ft.

- Hidden Bake Element
- Bake: 175°F-550°F
- Convection Bake: 175°F-550°F
- Convection Roast: 175°F–550°F
- Broil: Low-High
- Steam Bake: 230°F-550°F
- Steam Roast: 230°F-550°F
- Proofing
- Sabbath Mode

Warranty

One (1) Year All Parts and Labor

Product Dimensions & Weight (WxHxD)

Outside (Max) Wall Oven Dimensions:

 $29^{7}/_{8}$ " x $51^{3}/_{8}$ " x $25^{11}/_{16}$ "

Wall Oven Cut-Out Dimensions:

 $28^{1}/_{2}$ " x $50^{1}/_{4}$ " x $23^{1}/_{2}$ "

Weight: 273.4 lbs.

Shipping Dimensions & Weight (WxHxD)

Dimensions:

 $33^{1}/_{2}$ " x $56^{3}/_{8}$ " x $29^{13}/_{16}$ "

Weight: 306.4 lbs.

Color	Model#	UPC Code
Stainless Steel	NV51K6650DS	887276181684
Black Stainless Steel	NV51K6650DG	887276181677

KW RATING		
240V	10.6 kW	
208V	8.0 kW	
BREAKER SIZE		
BREAK	ER SIZE	
BREAKI 240V	ER SIZE 50 Amps	