

# 30-INCH DUAL-FUEL RANGE

HDPR30 | PROFESSIONAL STYLE



## AVAILABLE MODELS

HDPR30S/NG	30" Professional Dual Fuel Pro Range - Stainless Steel Natural Gas
HDPR30S/NG/H	30" Professional Dual Fuel Pro Range - Stainless Steel Natural Gas High Altitude
HDPR30S/LP	30" Professional Dual Fuel Pro Range - Stainless Steel Liquid
HDPR30S/LP/H	30" Professional Dual Fuel Pro Range - Stainless Steel Liquid Propane High Altitude
HDPR30C/NG	30" Professional Dual Fuel Pro Range - Color Match Natural Gas
HDPR30C/NG/H	30" Professional Dual Fuel Pro Range - Color Match Natural Gas High Altitude
HDPR30C/LP	30" Professional Dual Fuel Pro Range - Color Match Liquid Propane
HDPR30C/LP/H	30" Professional Dual Fuel Pro Range - Color Match Liquid Propane High Altitude

# FEATURES & BENEFITS

- → Exclusive Four-Part Pure Convection heating element, air baffle, fan and filter to precisely distribute heat for superior cooking results.
- $\rightarrow$  Large oven capacity 5.2 cu. ft.
- → 4 Dual-Stack Sealed Burners.
- $\rightarrow$  Powerful 18K BTU and true simmer burners.
- → Illumina<sup>™</sup> Knobs White LED
- → LED Tilt-Vue<sup>™</sup> Glass Touch Control
- $\rightarrow$  Soft Close Oven Door
- ightarrow Continuous Grate Platform
- ightarrow All Brass Valves, Heads and Caps

### ADD ITIONAL FEATURES

CLEANING TYPE	SELF CLEAN GREENCLEAN™	
TYPE OF GRATE	CONTINUOUS CAST IRON	
CAVITY	BLACK ENAMEL COATING	
RACK POSITIONS	6	
LIGHTING	LED & HALOGEN	


GENERAL PROPERTI ES		
OVEN CAPACITY (CUBIC FEET)	5.2 CU FT.	
COOKING MODES	PURE CONVECTION™ CONVECTION BAKE CONVECTION BROIL CONVECTION ROAST BAKE BROIL	
OVEN PERFORMANCE		
BAKE ELEMENT	3,000W - 8 PASS	
BROIL ELEMENT	3,500W - 8 PASS	
CONVECTION ELEMENT	2,200W - 2 PASS	
BURNER PERFORMANCE		
TOTAL NUMBER OF COOKTOP BURNERS	4 DUAL STACK BRASS BURNERS	
LEFT FRONT (BTU)	18,000 DUAL (SIMMER/SEAR)	
LEFT REAR (BTU)	15,000 STACK DUAL (SIMMER)	
RIGHT FRONT (BTU)	15,000 STACK DUAL (SIMMER)	
RIGHT REAR (BTU)	15,000 STACK DUAL (SIMMER)	
SEALED BURNERS	YES	
PERMA-FLAME™ (AUTO RE-IGNITION)	YES	
ADDITIONAL MODES		
KEEP WARM	YES	
PROOF	YES	
TEMPERATURE PROBE	YES	
DEHYDRATE	YES	
SABBATH	YES	
CONTROLFEATURES		
LED (WHITE)	YES	
NUMBER OF KNOBS	4 KNOBS	
CONTROL METHOD	LED GLASS TOUCH CONT	
ILLUMINA™ BURNER KNOBS	YES	
HIGHLIGHTING COLOR	WHITE	
CLOCK	YES	
DELAY START	YES	
KITCHEN TIMER	YES 2	
TIME OF DAY (12 HR/24 HR)	YES	
TEMPERATURE (F/C)	YES	
CHILD LOCK	YES	
SOUND ON/OFF	YES	
TECHNICAL DETAILS		
CIRCUIT BREAKER (A)	30 AMP	
VOLTS (V)	240 V	
FREQUENCY (HZ)	60 HZ	
ENERGY SOURCE	GAS AND ELECTRICAL	
GAS TYPES	NATURAL GAS NATURAL GAS (HIGH ALTITUDE) LIQUID PROPANE LIQUID PROPANE (HIGH ALTITUDE)	
DIMENSIONS & WEIGHT		
APPLIANCE DIMENSIONS (W X H X D) (IN.)	29 7/8" X 36 1/4" ~ 37 1/2" X 26 15/16"	
REQUIRED CUTOUT SIZE (W X D) (IN.)	30" minimum X 24"	
WARRANTY		
LIMITED, PARTS AND LABOR	1 YEAR	



### APPLIANCE D IMENS IONS

30"		
A (WIDTH)	29 7/8" (75.9CM)	
B (DEPTH)	26 15/16" (68.4CM)	
C (HEIGHT)	36 1/4" TO 37 1/2" (92.0-95.3CM)	

### Product tolerances: -+/-1/16" (+/-1.6MM)

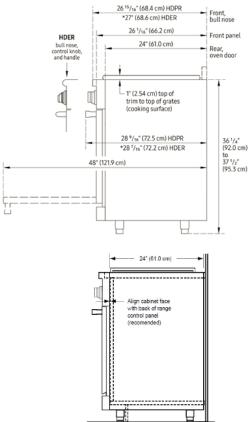


View of Range Installed (Side View)

# CABINET CUT-OUT DIMENSIONS

KANGE MODEL	F	G
HDPR30	36" (91.4 CM)* 30" (76.2 CM)**	30" (76.2 CM)**

\* Recommended \*\* Minimum

Cutout tolerances: +1/16" (+1.6 mm), -0 unless otherwise stated

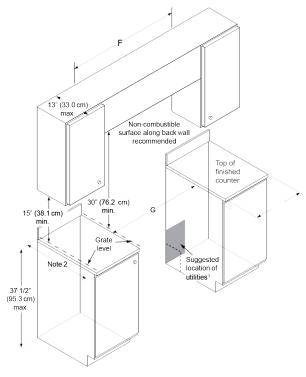

ACCESSORIES (INCLUDED)	
GLIDERACK™	2
STANDARD RACK	1
TEMPERATURE PROBE	1
WOK RING	1
CONVECTION FILTER	1
BRASS/BLACK PORCELAIN BURNER CAPS	6/EA
REMOVABLE NON-STICK GRIDDLE	1
ACCESSORIES (OPTIONAL)	
COOKIE SHEETS (SET OF 3)	ACS303
REMOVABLE NON-STICK GRIDDLE	ADRT14
BROIL/ROASTING PAN W/GRILL & V RACK	AORPVR
STAINLESS STEEL BACKGUARD, MOUNTS TO UNIT (6 IN HIGH)	AHB30D6
STAINLESS STEEL BACKGUARD, MOUNTS TO UNIT (9 IN HIGH)	AHB30D9
EPICURE HANDLE SET, 30" RANGE	AHHESR30