## 36-Inch Dual-Fuel Steam Range солтемроваву





DOP36C86DLS/DA - Silver Stainless, Natural Gas, Liquid Propane DOP36C86DLM/DA - Graphite Stainless, Natural Gas, Liquid Propane

## Features & Benefits

- Steam-Assist oven
- Dual Four-Part Pure Convection system
- SimmerSear<sup>™</sup> brass burners
- BrightVue<sup>™</sup> LED & halogen lighting
- · Motorized 7-inch LCD control panel with SmartThings Wi-Fi connectivity
- Chef Mode guided cooking
- · Auto Connect to compatible ventilation through Bluetooth
- Digital temperature probe
- Self-clean oven
- SoftShut<sup>™</sup> hinges
- LP conversion kit

## Controls


CONTROL TYPE	7" Motorized LCD Touchscreen & Knobs
CHEF MODE™ GUIDED COOKING	Yes
ILLUMINA™ KNOBS	White
WI-FI + SMARTTHINGS	Yes
BLUETOOTH AUTO CONNECT™ VENTILATION	Yes
CONTROL SHOWER LIGHTING	Yes
СГОСК	Yes
DELAY START	Yes
KITCHEN TIMER	Yes
CHILD LOCK	Yes
SABBATH MODE	Yes


Oven	
OVEN CAPACITY (CU. FT.)	4.8
CONVECTION	Dual Four-Part Pure
STEAM	Steam-Assist
BAKE ELEMENT	3,000W - 8 Pass
BROIL ELEMENT	4,400W - 10 Pass
CONVECTION ELEMENT	2 x 1,300W
INSTANTHEAT™ (NO PREHEAT)	Yes
TEMPERATURE PROBE	Yes
LIGHTING	BrightVue™ - LED & Halogen
SELF-CLEAN	Self-Clean, GreenClean™
SOFTSHUT™	Yes
Cooktop	
NUMBER OF BURNERS	6
PERMA-FLAME™ (AUTO RE-IGNITION)	Yes
LEFT FRONT (BTU)	22,000
LEFT REAR (BTU)	16,000
CENTER FRONT (BTU)	16,000
CENTER REAR (BTU)	16,000
RIGHT FRONT (BTU)	22,000
RIGHT REAR (BTU)	9,000
BRASS BURNER CAPS	Yes
GRIDDLE	Sold Separately
WOK RING	Yes
Weights & Dimensions	
NET WEIGHT (LBS.)	403
SHIPPING WEIGHT (LBS.)	474
PRODUCT DIMENSIONS (W x H x D IN INCHES)	35 % x 36 % x 27 ½
Technical Details	
ELECTRICAL REQUIREMENT	240V, 60 Hz, 40A
AVAILABLE FUEL TYPES	Natural Gas, Liquid Propane
LP CONVERSION KIT (INCLUDED)	Yes
Warranty	
FULL COVERAGE	2 Years
Accessories (Optional)	
ARG36 Griddle for 36" Pro-Range & Rangetop	

## 36-Inch Dual-Fuel Steam Range солтемроваву



Product Dimensions	
A - WIDTH (IN/CM)	35 7% / 91.1
B - DEPTH (IN/CM)	27 ½ / 69.9
C - HEIGHT (IN/CM)	36 1/8 / 91.8

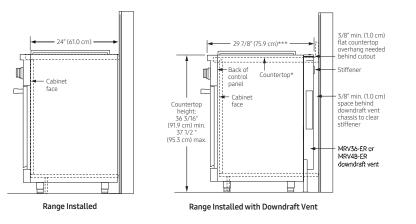



Installation Cutout Dimensions	
A - WIDTH (IN/CM)	36 / 91.4 MINIMUM 42 / 106.7 RECOMMENDED
B - WIDTH (IN/CM)	36 / 91.4

