# NSE6D\*8300

# Bespoke Smart Slide-In Electric Range 6.3 cu. ft. with Air Fry & Precision Knobs





### Features

- Air Fry, Tray Included
- Precision Knobs
- Convection
- Glass-Touch Controls
- Self & Steam Clean
- Storage Drawer

### Convenience

- Wi-Fi Connectivity
- Voice-Enabled
- Convection Auto Conversion
- Self & Steam Clean
- Hidden Bake Element
- Child Safety Lock
- Delay Start
- Auto Oven Light
- Kitchen Timer
- Sabbath Mode

# Specifications

#### Electric Ceramic Cooktop

- Right Front: 9"/12" 3,000W
- Left Front: 6"/9" 3,000W
- Right Rear: 6" 1,200W
- Left Rear: 6" 1,200W
- Center: 6" Warming Zone (100W)

#### Oven

- Capacity: 6.3 cu. ft.
- Convection Bake
- Convection Roast
- Bake
- Variable Broil: Low/High
- Air Fry
- Keep Warm
- Bread Proof
- Dehydrate

## **Available Colors**



Stainless Steel NSE6DG8300SR

White Glass NSE6DB830012

### Dimensions

**Oven Interior Dimensions (WxHxD)** Dimensions: 24<sup>13</sup>/<sub>16</sub>" x 22<sup>7</sup>/<sub>16</sub>" x 19<sup>3</sup>/<sub>4</sub>"

**Product Dimensions (WxHxD)** Dimensions: 29<sup>15</sup>/<sub>16</sub>" x 36<sup>1</sup>/<sub>4</sub>" – 37" (Adj.) x 27<sup>7</sup>/<sub>8</sub>" Weight: 160.5 lbs

#### Shipping Dimensions & Weight (WxHxD)

Dimensions: 33<sup>1</sup>/<sub>16</sub>" x 41<sup>1</sup>/<sub>8</sub>" x 30<sup>5</sup>/<sub>16</sub>" Weight: 180.1 lbs

#### Warranty

One (1) Year Parts and Labor

#### UPC

Finish	Model #	UPC Code
Stainless Steel	NSE6DG8300SR	887276817293
White Glass	NSE6DB830012	887276817231






# NSE6D\*8300

# SAMSUNG

# Bespoke Smart Slide-In Electric Range 6.3 cu. ft. with Air Fry & Precision Knobs

## **Installation Specifications**

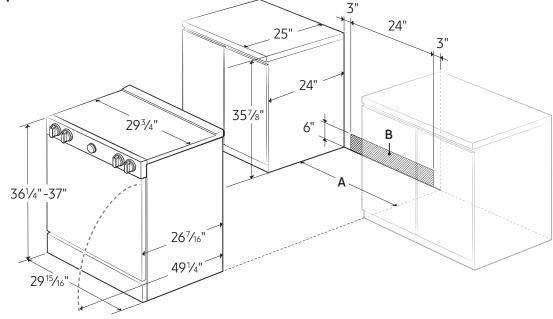


#### **Electrical Requirements**

240V/208V/60 Hz 40 Amps

#### A: Cabinet opening minimum 30" B: Acceptable electrical outlet area

IMPORTANT: If your cabinets are over 37" high, you must install this range on a hard, heat resistant support that raises the surface of the range so that it is about even with the countertop.

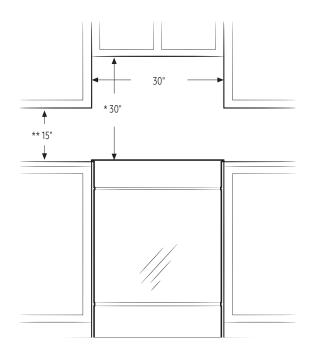

- \* 30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when the bottom of the wood or metal cabinet is protected by not less than ¼" of flame retardant millboard covered with not less than no.28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum, or 0.020" copper.
- \*\*15" minimum between the countertop and the adjacent cabinet bottom.

IMPORTANT: Consult with Installation Manual for detailed instructions before installing. All ranges must be installed with the Anti-Tip device that is included.