

36" Gas Professional Range

NX36R9966

Available Colors

Fingerprint Resistant Matte Black Stainless Steel (shown)
Stainless Steel



Two 22K Brass Dual Power burners offer the versatility of intense heat to quickly boil water or precisely simmer to slowly melt chocolate.


Dual Convection twin fans circulate air for fast, even cooking on all 3 racks.

Bluetooth® connectivity automatically starts the hood* when the range turns on.

*With compatible Samsung ventilation hood.



22K Brass Dual Power Burner

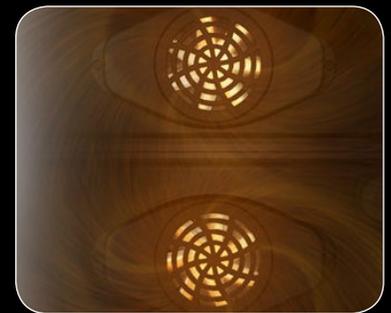

Dual Convection

Features

- Digi-Touch Controls with PMOLED Display
- LED Ambient Lighting
- Blue LED Illuminated Knobs
- Wok Grate
- 5.9 cu. ft. Capacity
- Soft-Close Door
- 6 Gas Burners
 - Right Front: 22K BTU (Dual Brass)
 - Left Front: 22K BTU (Dual Brass)
 - Center Front: 16K BTU
 - Center Rear: 16K BTU
 - Right Rear: 16K BTU (Dual)
 - Left Rear: 16K BTU (Dual)
- 5 Ladder Rack Positions
- 3 Heavy-Duty Racks including 2 Gliding Racks
- Proofing
- Warming Mode
- Burner On/Off Monitoring
- Wi-Fi Connectivity
- Wi-Fi Enabled Temperature Probe
- LED Spotlights
- Self-Clean
- Hidden Heating Element
- Sabbath Mode
- Kitchen Timer
- Child Safety Lock
- Sealed Burners
- Auto Re-Ignition
- LP Conversion Kit
- Anti-Tip Device
- ADA Compliant




ADA Compliant

36" Gas Professional Range

NX36R9966

Installing Your Gas Professional Range

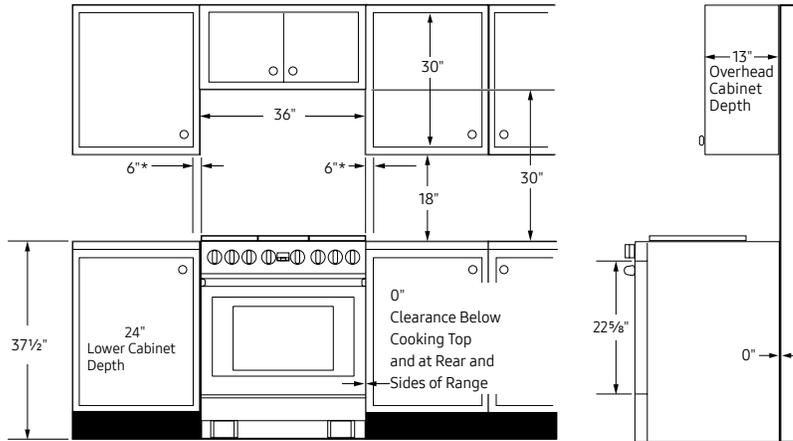


* Side clearance above cooking surface to any objects, i.e., wall.

30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when the bottom of the wood or metal cabinet is protected by not less than 1/4" flame-retardant millboard covered with not less than no. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.


IMPORTANT: If overhead cabinets are installed, a range hood should also be installed and project horizontally a minimum of 5" beyond the front of the cabinets. Hood is necessary to dissipate any heat buildup in the overhead cabinets to prevent possibility of fire, personal injury and/or death.

Recommended locations for gas piping and electrical outlets

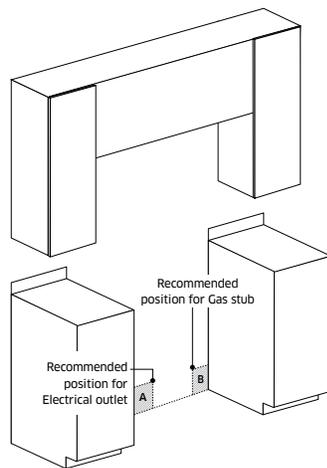

Model	NX36R9966*
A	Electrical outlet 9 7/8"(W) X 6 7/8"(H) (25.1 cm x 17.5 cm)
B	Gas piping 7 3/8"(W) X 5 3/8"(H) (18.6 cm x 13.8 cm)

Oven Dimensions

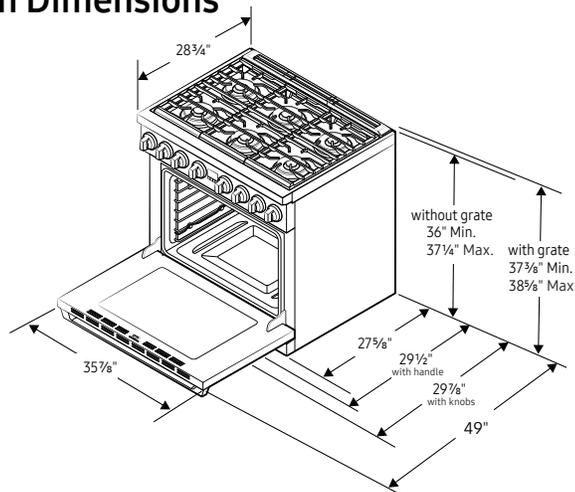

Total Power (BTU)

108K BTU

Power Source

120V / 60 Hz / 10A

6-Burner Cooktop

- Right Front: 22K BTU (Dual Brass)
- Left Front: 22K BTU (Dual Brass)
- Center Front: 16K BTU
- Center Rear: 16K BTU
- Right Rear: 16K BTU (Dual)
- Left Rear: 16K BTU (Dual)

Oven

- Hidden Bake Element
- Bake: 150°F - 550°F
- Convection Bake: 150°F - 550°F
- Bake Burner: 25K BTU
- Broil Burner: 18K BTU
- Variable Broil: Low/Med/High
- Convection Roast: 150°F - 550°F
- Pro Convection: 150°F - 550°F
- Keep Warm
- Proofing
- Dehydrate
- Sabbath Mode

Warranty

Two (2) Year All Parts and Labor

Product Dimensions & Weight (WxHxD)

Outside (Max) Oven Dimensions:

35 7/8" x 37 3/8" x 29 7/8"

Weight: 422.6 lbs

Shipping Dimensions & Weight (WxHxD)

Dimensions:

38 15/16" x 49 13/32" x 33"

Weight: 499.6 lbs

Color

Stainless Steel

Model

NX36R9966PS

UPC Code

887276292588

Fingerprint Resistant
Matte Black

Stainless Steel

NX36R9966PM

887276292571

4" High Backguard

NX-AB5460PS

NX-AB5460PM